

VERSUS SILENT



STRENGTHS

- > Double-flow ventilation room by room
- > Installation in living areas only: living room, bedrooms, offices, etc.
- > Can be installed alone in a room or, for greater efficiency, in pairs to ventilate an entire area
- > Very easy to install, ideal for renovation thanks to ready-to-use elements
- > Extremely quiet operation: from 10 dB(A)
- > Flow rate up to 58 m³/hour
- > Heat recovery efficiency up to 87%
- > Controller for up to 8 devices
- > Possibility of adding humidity sensors


Description	Ref. no.
Versus Silent - Kit	1306.0003

DESCRIPTION


- > Reversible fan with temperature controller and wind pressure stabiliser, integrated in a double air flow straightening deflector - classified S3 (in accordance with DIN EN 13141-8)
- > Speed can be adjusted gradually or according to 4 predefined levels via the controller
- > Ceramic honeycomb heat accumulator, efficiency up to 87%
- > Acoustically insulated wall-mounting sleeve
- > White inner panel with 1 G3 pollen filter - Coarse 45% (in accordance with ISO 16890)
- > White external cover with weather protection, resistant to driving rain
- > Controller including built-in power supply. Touch control, LED display for speed and "heat recovery" and "ventilation" operating modes. Pause function (1, 2, 4 or 8 hours), boost function (15 min) and operating hours counter. Available in two versions (see accessories page 35):
 - s4: controls up to 4 devices (including sensors)
 - s8: controls up to 8 devices (including sensors)
- > Humidity sensors can be connected to display relative humidity and ambient air temperature

DIMENSIONS


Weight: 6.85 kg (kit) / 450 g (controller)

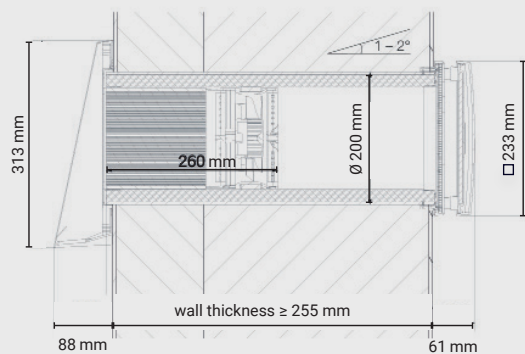

External cover



Controller



TECHNICAL DATA


- > Maximum flow rate: 58 m³/h
- > Maximum power: 3 W
- > Energy rating: **A+** (with sensors) / **A** (without sensors)
- > Voltage: 6-16 V DC
- > Module rating: IP20
- > Maximum operating temperatures: -20°C / 50°C



Complies with Eco-design directive 1253/2014 and energy labelling directive 1254/2014



EXAMPLE OF A STANDARD SET-UP

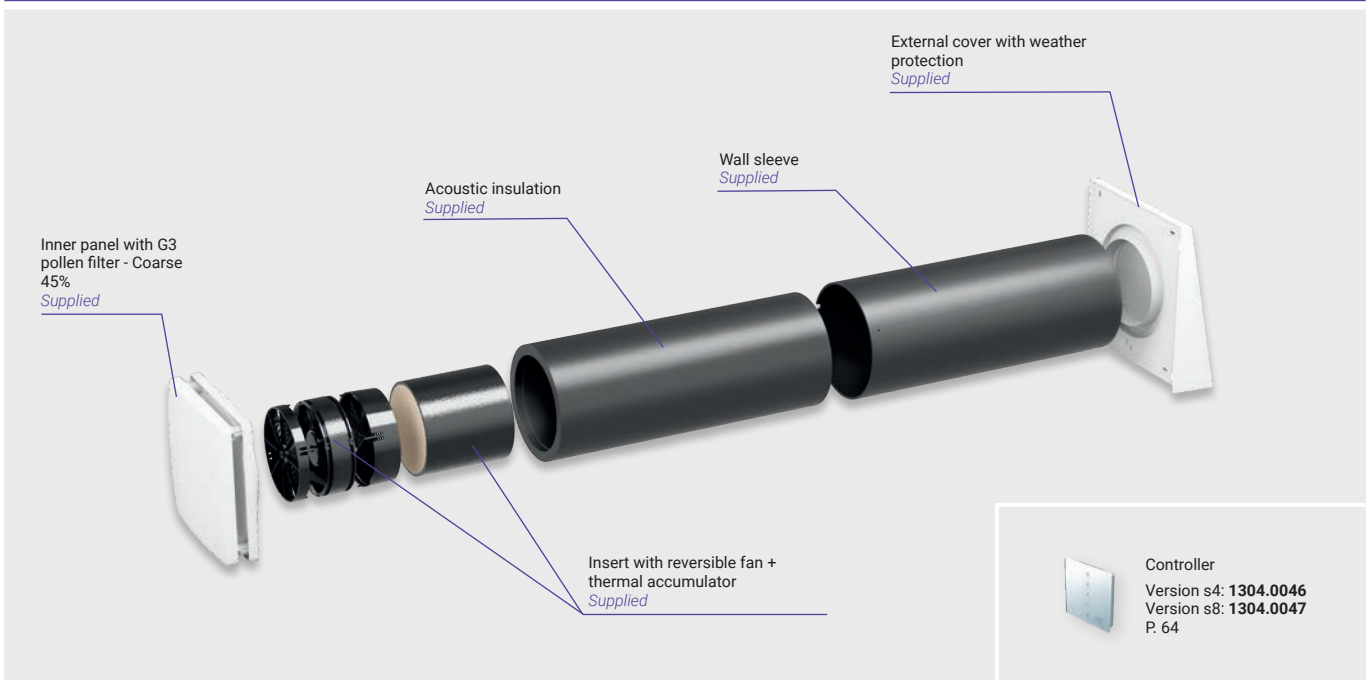

PERFORMANCE

		Controller s4	Controller s8
Air flow rate in heat recovery mode (m ³ /h)	8.5 - 29		
Extracted air flow rate (m ³ /h)	17 - 58		
Power (W)	1 - 3		
Sound pressure level dB(A), 2m	10 - 31		
Heat recovery (%)	87		
		Mains voltage (V AC), (Hz)	230, 50
		Input voltage (V DC)	24
		Fan voltage (V DC)	6.7 - 15.3
		External input (V DC)	0 - 10
		Power (W)	max 11
		Standby (W)	< 1

BOX CONTENTS

Description	Quantity
Insert with reversible fan + thermal accumulator	1
Inner panel with G3 pollen filter - Coarse 45%	1
Wall sleeve	1
External cover with weather protection	1

ACCESSORIES

Description	Ref. no.	Details
Inner panel with G3 pollen filter - Coarse 45%	1304.0043	P. 64
Wall sleeve	1304.0044	
Soundproofing insert R-D160 for wall sleeve	1304.0030	
R-D160 wind protection insert for wall sleeve	1304.0031	
External cover with weather protection - white	1304.0021	
Controller s4	1304.0046	
Controller s8	1304.0047	
Flush-mounting box for s4/s8 controller	1304.0052	
Humidity detector	1304.0048	
G3 Pollen filter - Coarse 45%	1304.0049	
Pollen filter M5 - Coarse 75%	1304.0050	P. 59
100 g/m ² activated carbon odour filters	1304.0051	