



The Chico air extractor operates **intermittently** and **exceptionally quietly** thanks to its **very low consumption motor**. It can be installed on the wall, ceiling, or window in **bathrooms** and **toilets**. It is available in **switch, timer, or humidity detection versions**.

STRENGTHS

- > **Intermittent operation**
- > **Silent**: from 12 dB(A)
- > **Energy-efficient**: very low consumption motor (4.8 W)

Description	Ref. no.
Chico B	1302.0024
Chico T	1302.0026
Chico H	1302.0028



DESCRIPTION

- > Ø 100 mm
- > Wall, ceiling or window installation
- > Installation volume 1
- > Good-looking ABS body and front panel
- > Ultra-low power consumption, ultra-quiet motor
- > 2 speeds adjustable during installation: 21 or 75 m³/h
- > 3 operating options:
 - B = the extractor is activated by a switch
 - T = the extractor is activated by a switch and has an adjustable timer between 5 and 30 minutes.
 - H = the extractor is activated by humidity detection (adjustable trigger threshold) and has a fixed 15-minute timer.
- > Non-return valve
- > White

TECHNICAL DATA


- > Maximum flow rate: 75 m³/h
- > Maximum motor output: 4.8 W
- > Duct length: 1.5 m
- > Voltage: 220 - 240 V – 50 Hz
- > Extractor rating: IPX5
- > Maximum operating temperatures: -5°C / 40°C

BOX CONTENTS

Description	Quantity
Extractor	1
Non-return valve	1

DIMENSIONS


Weight: 677 g

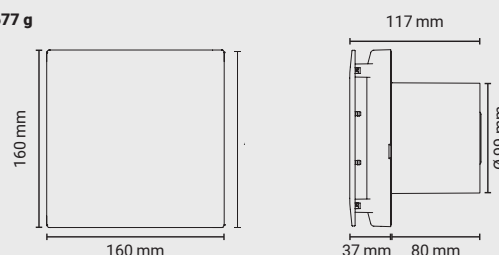

PERFORMANCE

Speed	Flow rate (in m³/h)	Power (in W)
Low speed	21	2.7
High speed	75	4.8

dB(A) = 12, measured at 3m at low speed

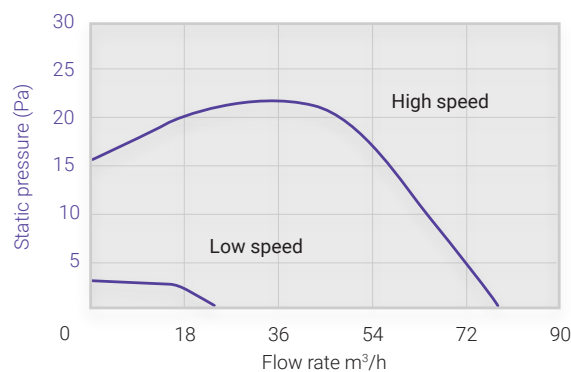

ACCESSORIES

Description	Ref. no.
Outer grille with shutter Ø 100 mm white	1304.0015