



STRENGTHS

- > Intermittent operation
- > With indicator light

Description	Ref. no.
Fuji B - V2	1302.0015
Fuji T - V2	1302.0016
Fuji H - V2	1302.0017
Fuji B - V0	1302.0018
Fuji H - V0	1302.0019

The Fuji air extractor is ideal for **intermittently** renewing the air in **bathrooms** or **toilets**. With a **high airflow** rate of up to 108 m³/h, it is available in **different versions: cord, switch, timer, or humidity detection**.



DESCRIPTION


- > Ø 100 mm
- > Wall, ceiling or window installation
- > Volume 0 or 2 installation depending on model
- > ABS body
- > Very low consumption motor
- > 1 speed: 108 m³/h for V2 models or 82 m³/h for V0 models
- > 4 operating options:
 - B = the extractor is activated by a cord (Fuji B - V2) or a switch (Fuji B - V0)
 - T = the extractor is activated by a switch and has an adjustable timer between 3 and 25 minutes
 - H = the extractor starts up when humidity is detected, with a trigger threshold adjustable between 40% and 95% RH. These models also have a manual release via a cord
- > Operating indicator light
- > White

TECHNICAL DATA

- > Maximum flow rate: 82 m³/h (V0 models) or 108 m³/h (V2 models)
- > Maximum motor output: 13 W (Fuji B - V2 model) or 15 W (Fuji T - V2 model) or 16 W (Fuji B - V0 and Fuji H - V2 models) or 18 W (Fuji H - V0 model)
- > Duct length: 1.5 m
- > Voltage: 220 - 240 V – 50 Hz
- > Extractor rating: IPX4 (V2 models) and IPX7 (V0 models)
- > Maximum operating temperatures: -5°C / 40°C (V2 models) and 0°C / 40°C (V0 models)

DIMENSIONS

Weight: 600 g

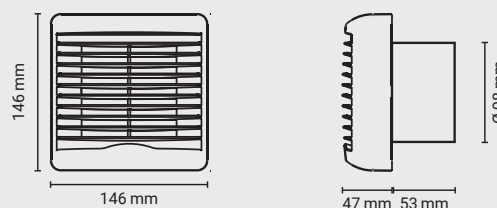

PERFORMANCE

Model	Flow rate (in m ³ /h)	Power (in W)	dB(A) ⁽¹⁾
Fuji B - V2	108	13	36
Fuji T - V2	108	15	
Fuji H - V2	108	16	
Fuji B - V0	82	16	
Fuji H - V0	82	18	

⁽¹⁾ measured at 3m

BOX CONTENTS

Description	Quantity
Extractor	1
Cord (for H models and B model - V2)	1
Transformer (for V0 models)	1

ACCESSORIES

Description	Ref. no.
Outer grille with shutter Ø 100 mm white	1304.0015