



The Haku air extractor fits easily into **bathrooms and toilets** with its **ultra-slim profile**. Available in **switch, timer, humidity detection, or presence detection versions**, it extracts air **intermittently** at 75 m³/h.

STRENGTHS

- > Intermittent operation
- > Extra-slim design

Description	Ref. no.
Haku B - V2	1302.0007
Haku T - V2	1302.0009
Haku H - V2	1302.0011
Haku PIRT - V2	1302.0013
Haku B - V0	1302.0001
Haku T - V0	1302.0003
Haku H - V0	1302.0005



DESCRIPTION


- > Ø 100 mm
- > Wall, ceiling or window installation
- > Volume 0 or 2 installation depending on model
- > ABS body
- > Very low consumption motor
- > 1 speed: 75 m³/h
- > 5 operating options:
 - B = the extractor is activated by a switch
 - T = the extractor is activated by a switch and has an adjustable timer between 5 and 25 minutes
 - H = the extractor is activated by humidity detection with an adjustable trigger threshold (60-95% RH for the Haku H - V0 model and 65-95% RH for the Haku H - V2 model). The Haku H - V2 model also has a fixed 15-minute timer, while the Haku H - V0 model also has a manual release switch
 - PIRT = the extractor switches on automatically when it detects movement and has a timer that can be set between 5 and 25 minutes
- > Operating indicator light
- > Non-return valve
- > White

TECHNICAL DATA

- > Maximum flow rate: 75 m³/h
- > Maximum motor output: 15 W (V0 models) or 16 W (V2 models)
- > Duct length: 1.5 m
- > Voltage: 220 - 240 V – 50 Hz
- > Extractor rating: IPX4 (V2 models) and IPX7 (V0 models)
- > Maximum operating temperatures: -5°C / 40°C (V2 models) and 0°C / 40°C (V0 models)

DIMENSIONS

Weight: 444 g

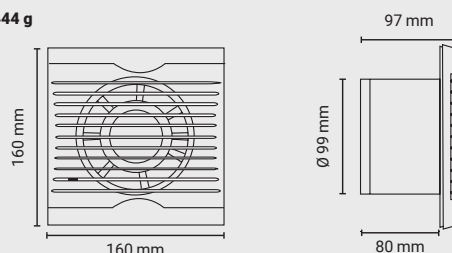

PERFORMANCE

Model	Flow rate (in m ³ /h)	Power (in W)	dB(A) ⁽¹⁾
Haku B/T/H/PIRT - V2	75	16	30
Haku B/T/H - V0	75	15	30

⁽¹⁾measured at 3m

BOX CONTENTS

Description	Quantity
Extractor	1
Non-return valve	1
Transformer (V0 models only)	1

ACCESSORIES

Description	Ref. no.
Outer grille with shutter Ø 100 mm white	1304.0015