



The K2 is the most complete and versatile air **extractor on the market**, designed for **kitchens, bathrooms, toilets, and laundry rooms** with a flow rate of up to 140 m<sup>3</sup>/h. It offers both **continuous and intermittent** operation, and is equipped with numerous sensors. In addition to **detecting light, humidity, and unpleasant odours**, the K2 is the only extractor controlled via a mobile app.

## STRENGTHS

- > **Two-in-one functionality:** continuous or intermittent operation
- > **Customisable control** with multiple light, humidity, and odour sensors
- > **Silent:** from 19 dB(A)

| Description | Ref. no.  |
|-------------|-----------|
| K2          | 1302.0034 |



## DESCRIPTION


- > Ø 100 mm and Ø 125 mm (interchangeable flanges)
- > Wall or ceiling installation
- > Installation volume 2
- > ABS body
- > Magnetic front panel
- > Quiet, low-energy motor, removable for easy maintenance
- > Speeds adjustable between:
  - 36 to 115 m<sup>3</sup>/h (in Ø 100 mm)
  - 54 to 140 m<sup>3</sup>/h (in Ø 125 mm)
- > The extractor operates either continuously, with a boost mode, or intermittently.
- > It has various operating options:
  - Timer from 5 to 60 minutes with delay function
  - Humidity detection with 3 possible trigger thresholds
  - Detection of unpleasant odours with 3 possible trigger thresholds
  - Light detection with 3 possible trigger thresholds
- > In intermittent mode, it also has an aeration function: if the extractor has been inactive for 26 hours, it automatically starts an extraction programme for 60 minutes to renew the air in the bathroom.
- > Parameter setting via LED touch panel or advanced settings via the VMI+ mobile application
- > White

## TECHNICAL DATA

- > Maximum flow rate: 140 m<sup>3</sup>/h
- > Maximum motor output: 5 W
- > Duct length: 6 m
- > Voltage: 100-240V AC 50-60 Hz
- > Extractor rating: IP44
- > Maximum operating temperatures: 0°C / 50°C

## DIMENSIONS


Weight: 435 g

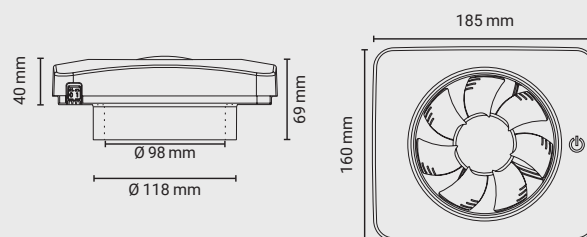

## PERFORMANCE

| Diameter in mm | Speed      | Flow rate in m <sup>3</sup> /h | Power input in W | dB(A) <sup>(1)</sup> |
|----------------|------------|--------------------------------|------------------|----------------------|
| Ø 100          | Continuous | 36                             | 2                | 19                   |
| Ø 100          | Maximum    | 115                            | 5                | 44                   |
| Ø 125          | Continuous | 54                             | 2                | 23                   |
| Ø 125          | Maximum    | 140                            | 5                | 49                   |

<sup>(1)</sup> measured at 3m

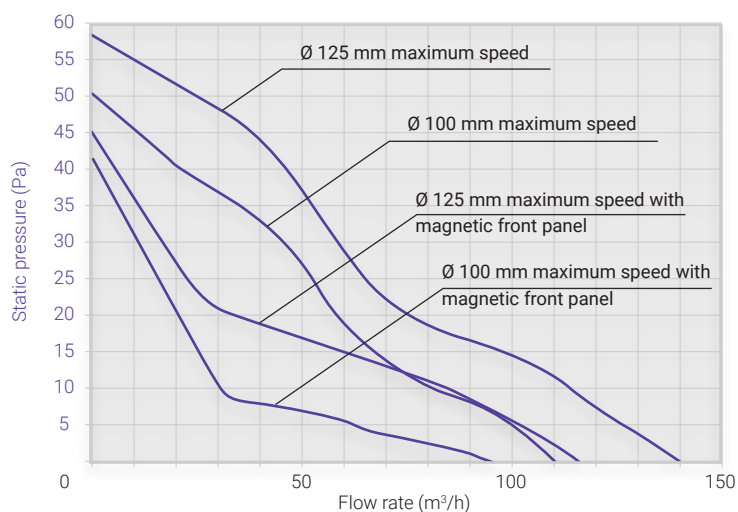

## BOX CONTENTS

| Description          | Quantity |
|----------------------|----------|
| Extractor            | 1        |
| Magnetic front panel | 1        |
| Ø 100 mm collar      | 1        |
| Ø 125 mm collar      | 1        |

## ACCESSORIES

| Description                  | Ref. no.  |
|------------------------------|-----------|
| Magnetic front panel - white | 1304.0040 |
| Check valve Ø 100 mm         | 1304.0041 |
| Check valve Ø 125 mm         | 1304.0042 |
| Wall finish plate - white    | 1304.0076 |

