



The Kibo air extractor for **bathrooms and toilets** is the **quietest on the market**, featuring a **very low consumption motor**, allowing **continuous operation starting at just 7.4 dB(A)**. With its sleek, modern design, **the Kibo automatically detects humidity** and includes an integrated **timer**.

STRENGTHS

- > **Continuous operation**
- > **Experience the quietest performance on the market:** with noise levels starting at just 7.4 dB(A)
- > **Energy-efficient:** very low consumption motor (1.51 W)

Description	Ref. no.
Kibo B - V1	1302.0022
Kibo H - V1	1302.0023



DESCRIPTION


- > Ø 100 mm
- > Wall or ceiling installation
- > Installation volumes 1 and 2
- > Good-looking ABS body and front panel
- > Ultra-low power consumption, ultra-quiet motor
- > Speed adjustable between 18 and 86 m³/h during installation
- > Wind pressure detection system. The device is thus able to compensate for the effects of wind (which can limit air flow) by automatically increasing its speed in the event of sustained and excessive wind.
- > 2 operating options:
 - B = standard
 - H = humidity detection. The extractor automatically increases its airflow proportionally when the relative humidity fluctuates between 76 and 85% RH, then switches to "boost" mode above 86% RH. The device also has a "rapid rise detection" mode: if the humidity rises by more than 5% RH compared with the measurement taken 5 minutes earlier, the fan switches to "boost" mode. Once the humidity starts to drop, the fan remains in "boost" mode for a further 30 minutes or until the humidity returns to its original level. Lastly, the appliance has a "comfort" mode that delays the activation of the "boost" mode by up to 20 minutes to minimise noise and cold draughts during the bath.
- > White

TECHNICAL DATA

- > Maximum flow rate: 86 m³/h
- > Maximum motor output: 1.51 W
- > Duct length: 1.5 m
- > Voltage: 220 - 240 V – 50 Hz
- > Extractor rating: IPX5
- > Maximum operating temperatures: -5°C / 40°C

DIMENSIONS


Weight: 543 g

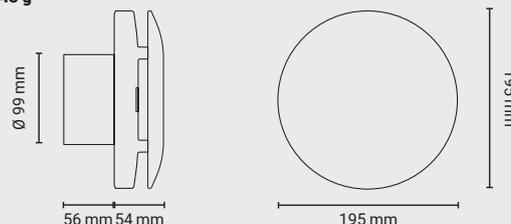

PERFORMANCE

Speed	dB(A) ⁽¹⁾
Min	7.4
Max	34.3

⁽¹⁾ measured at 3m

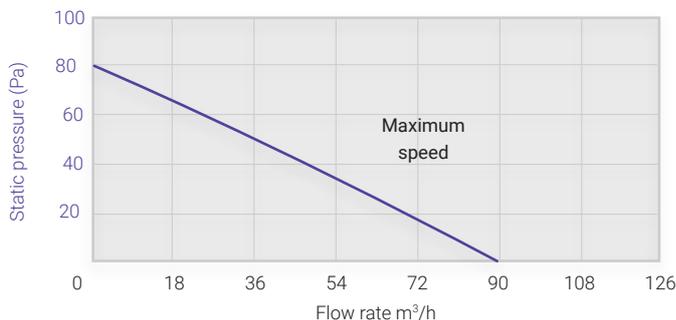

BOX CONTENTS

Description	Quantity
Extractor	1

ACCESSORIES

Description	Ref. no.
Outer grille with shutter Ø 100 mm white	1304.0015