

The Versus Silent decentralised heat recovery system can be installed individually or in pairs to **ventilate specific areas of a home**. Designed for **living rooms, bedrooms, and offices**, it is controlled via a wired controller and optional humidity sensors. Its thermal accumulator **recovers up to 87% of the heat from extracted air** to warm the incoming fresh air.

STRENGTHS

- > **Simplified installation and maintenance:** the benefits of a mechanical ventilation system with heat recovery
- > **Energy savings:** Up to 87% heat recovery from extracted air
- > **Ultra-quiet operation:** operates from just 10 dB(A)

Description	Ref. no.
Versus Silent - Kit without controller	1306.0003






DESCRIPTION

- > Reversible fan with temperature controller and wind pressure stabiliser, integrated in a double air flow straightening deflector - classified S3 (in accordance with DIN EN 13141-8)
- > Speed can be adjusted gradually or according to 4 predefined levels via the controller
- > Ceramic honeycomb heat accumulator, efficiency up to 87%
- > Acoustically insulated wall-mounting sleeve
- > White inner panel with 1 G3 pollen filter - Coarse 45% (in accordance with ISO 16890)
- > White external cover with weather protection, resistant to driving rain
- > Controller including built-in power supply. Touch control, LED display for speed and "heat recovery" and "ventilation" operating modes. Pause function (1, 2, 4 or 8 hours), boost function (15 min) and operating hours counter.
Available in two versions :
 - s4: controls up to 4 devices (including sensors)
 - s8: controls up to 8 devices (including sensors)
- > Humidity sensors can be connected to display relative humidity and ambient air temperature

DIMENSIONS

Weight: 6.85 kg (kit) / 450 g (controller)

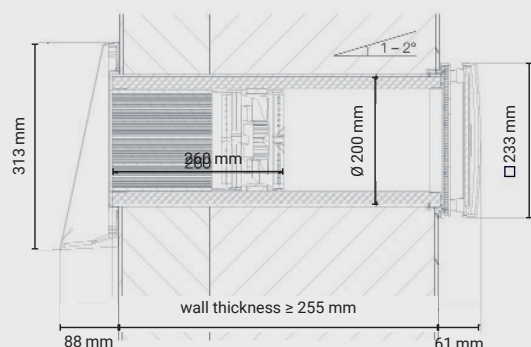

TECHNICAL DATA


- > Maximum flow rate: 58 m³/h
- > Maximum power: 3 W
- > Energy rating: **A+** (with sensors) / **A** (without sensors)
- > Voltage: 6-16 V DC
- > Module rating: IP20
- > Maximum operating temperatures: -20°C / 50°C





Complies with Eco-design
directive 1253/2014
and energy labelling
directive 1254/2014

EXAMPLE OF A STANDARD SETUP

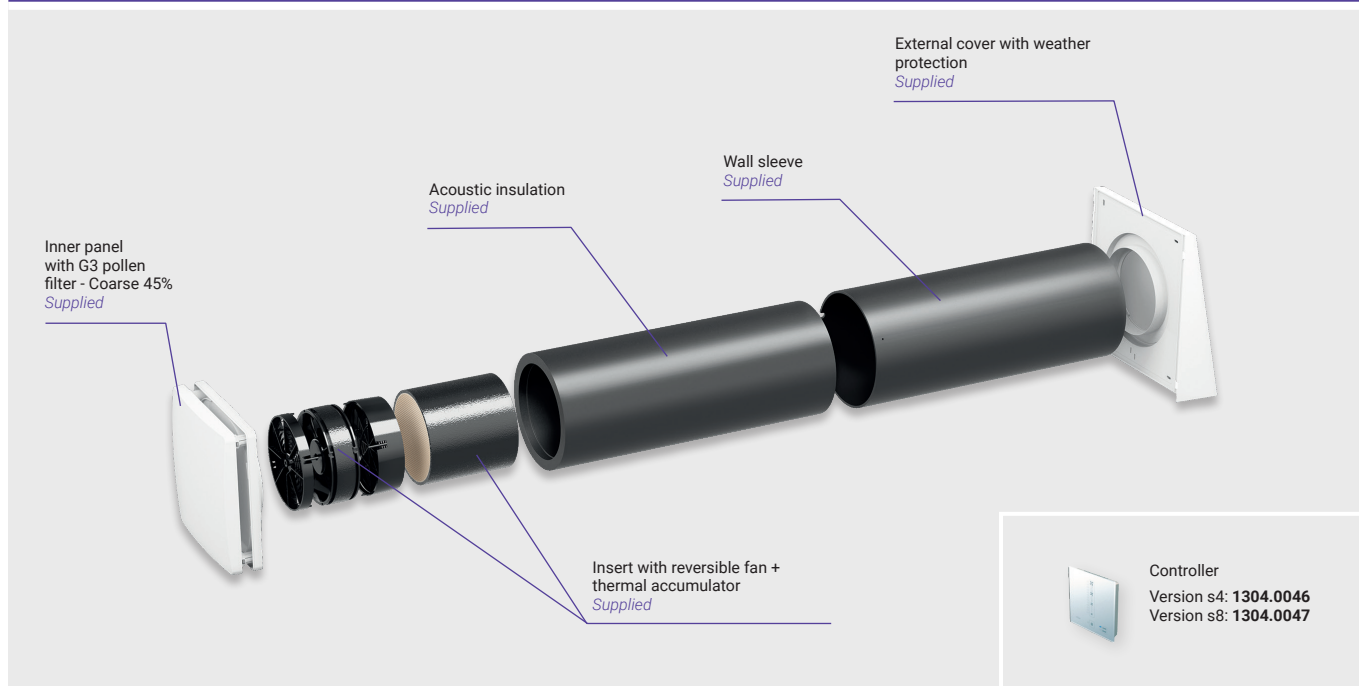

PERFORMANCE

		Controller s4	Controller s8
Air flow rate in heat recovery mode (m³/h)	8.5 - 29	230, 50	230, 50
Extracted air flow rate (m³/h)	17 - 58	24	24
Power (W)	1 - 3	6.7 - 15.3	6.7 - 15.3
Sound pressure level dB(A), 2m	10 - 31	0 - 10	0 - 10
Heat recovery (%)	87	max 11	max 20
		Standby (W)	< 1

BOX CONTENTS

Description	Quantity
Insert with reversible fan + thermal accumulator	1
Inner panel with G3 pollen filter - Coarse 45%	1
Wall sleeve	1
External cover with weather protection	1

ACCESSORIES

Description	Ref. no.
Inner panel with G3 pollen filter - Coarse 45%	1304.0043
Soundproofing insert R-D160 for wall sleeve	1304.0030
R-D160 wind protection insert for wall sleeve	1304.0031
External cover with weather protection - white	1304.0021
Wall sleeve	1304.0044
Controller s4	1304.0046
Controller s8	1304.0047
Humidity detector	1304.0048
2 pollen filters G3 - Coarse 45%	1304.0049
2 pollen filters M5 - Coarse 75%	1304.0050
2x 100 g/m² activated carbon odour filters	1304.0051